



**SHERWIN
WILLIAMS.**

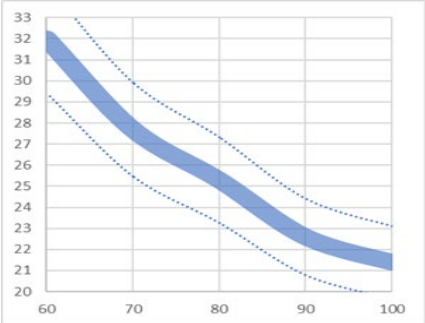
Industrial Wood Coatings

CC-F23

SHER-WOOD® CAB-Acrylic Lacquer

GlossT75C15
Medium Rubbed Effect (MRE)T75F17

Bright Rubbed (BRE).....T75F16
Dull Rubbed Effect (DRE).....T75F18

<u>DESCRIPTION</u>	<u>CHARACTERISTICS</u>	<u>SPECIFICATIONS</u>
<p>SHER-WOOD® CAB-Acrylic Lacquer is formulated to meet the water white and non-yellowing demands of the furniture, kitchen cabinet, and wood finishing markets. It is intended as a clear topcoat over white, "pickled" or light pastel stains where the best non-yellowing properties are required. Cellulose Acetate Butyrate (CAB) Acrylic presents the best chemistry of lacquers for resistance to yellowing.</p> <p>Advantages:</p> <ul style="list-style-type: none"> • Meets the federal HAPS rule for wood products as packaged* • Water-white color • Excellent resistance to yellowing - superior to all nitrocellulose compositions • Meets KCMA specifications when applied over Sher-Wood Vinyl Sealer T67F3, T67F5 or T67F6 • Fast drying - similar to nitrocellulose lacquers • Excellent film clarity and color retention • Application by conventional, airless or air assisted airless spray equipment • Excellent print resistance after overnight dry • May be used as a shading lacquer or toner by adding GIS or OptiColor® XP colorants up to 4 ounces per gallon. <p>Air Quality Data (Theoretical): May vary by color</p> <ul style="list-style-type: none"> • Non-Photochemically reactive • Volatile Organic Compounds (VOC) as packaged, maximum less exempt solvents 5.60 lb/gal, 672 g/L 3.20 lbs VOC/lb solids • Hazardous Air Pollutants as packaged, maximum less than 0.8 lb per pound of solids <p>*National Standards for Hazardous Air Pollutants (HAPS) Emissions for Wood Furniture Manufacturing Operations CFR40, Part 63, Subpart JJ</p>	<p>Gloss (measured on black glass):</p> <p>Gloss 85+ units BRE 55-59 units MRE 34-38 units DRE 17-21 units</p> <p>Volume Solids: 19 ± 1%</p> <p>Package Viscosity: 26-32 seconds #2 Zahn Cup 23-28 seconds #4 Ford Cup</p>  <p><i>The above chart is for information only and should not be used as product specifications</i></p> <p>Recommended film thickness: Mils Wet 4.5 - 6.0 Mils Dry 0.7 - 1.0</p> <p>Spreading Rate (no application loss) 310-443 sq ft/gal @ 0.7-1.0 mil dft</p> <p>Drying (77°F, 50% RH): To Touch: 10 minutes To Handle: 15-20 minutes To Sand: 30-60 minutes To Recoat: 30-60 minutes Force Dry: 10 -20 minutes at 110-140° F</p> <p>Flash Point: 37°F PMCC</p> <p>Package Life: 24 months, unopened</p> <p>An Environmental Data Sheet is available from your local Sherwin-Williams facility or at www.paintdocs.com</p>	<p>Surface preparation:</p> <p>Wood - New Work (interior only): Must be clean, dry, and finish sanded. Substrate should be free of grease, oil, dirt, fingerprints, and any contamination to ensure optimum adhesion and coating performance properties. Moisture content of wood should be 6 to 8%.</p> <p>Previously finished wood (interior only): Strip old finishes completely and remove all contaminants from the surface. Make sure surface is dry. Finish as new work.</p> <p>Wood Finishing System:</p> <ol style="list-style-type: none"> 1. Apply full wet coat of Sher-Wood Vinyl Sanding Sealer, T67F3, T67F5 or T67F6. 2. Air dry 30 minutes, sand, remove all sanding dust. 3. Apply full wet coat of Sher-Wood CAB-Acrylic Lacquer and allow 30-60 minutes drying. 4. For more depth and better appearance, apply a second coat. <p>Do not exceed 4.0 mils DFT for total system.</p> <p>Testing: The information, data, and recommendations set forth in this Product Data Sheet are based upon test results believed to be reliable. However, due to the wide variety of substrates, substrate properties, surface preparation methods, equipment and tools, application methods, and environments, the customer should test the complete system for adhesion, compatibility and performance prior to full scale application.</p>

APPLICATION

Typical Setups

Reducer: See below for recommendation

Retard: In high humidity conditions or Where blushing is evident, add 1-2% 2-butoxyethanol R6K25, or MAK, R6K30, as a HAPS compliant alternative.

Typical Setups

Conventional Spray:

Air Pressure 45-65 psi
Fluid Pressure 6-8 psi
Reducer none

Airless Spray:

Pressure 1200-1800 psi
Tip011-.015"
Reducer HAPS compliant
lacquer thinner, R7K320 as needed up to 10%. Lacquer thinner, R7K120 may also be used, but is not HAPS compliant.

Air Assisted Airless:

Air Assist 10-15 psi
Fluid Pressure 400-600 psi
Cap/Tip011-.015"
Reducer HAPS compliant
lacquer thinner, R7K320 as needed up to 10%. Lacquer thinner, R7K120 may also be used, but is not HAPS compliant.

Cleanup:

Clean tools and equipment immediately after use with HAPS complying lacquer thinner, R7K320. Lacquer thinner K120 or K22 may also be used but are not HAPS compliant

Follow manufacturer's safety recommendations when using any solvent

All trademarks are the property of their respective owners.

ADDITIONAL INFORMATION

Product Limitations:

- Surface to be finished must be free of grease, dirt, and other foreign matter.
- Sher-Wood Vinyl Sealer, T67F3, T67F5 or T67F6, must be used as a sealer to meet the KCMA specification. Do not use any other lacquer or vinyl sealers under CAB- Acrylic Lacquer.
- Self-sealing systems are not recommended.
- Maximum cure and resistance properties are not obtained for at least 14 days air drying.
- Yellowing over white and pastel colors may occur due to the yellowing tendency of the color system (stain, base-coat, etc.), and not to the clear CAB- Acrylic topcoat.
- Natural finished wood will change color on aging and exposure to light. This is a natural phenomenon. Clear finishes will not prevent the wood from changing color.
- For interior use only.
- Agitate thoroughly before use.
- To maintain HAPS compliance only reduce with HAPS compliant reducers.
- Do not exceed 4.0 mils DFT for total system.

Performance Tests:

Wood test panels prepared with one coat Sher-Wood Vinyl Sealer, T67F3 and two coats Sher-Wood CAB-Acrylic Lacquer, T75F17 (MRE). Allowed to ambient age 30 days
Panels tested per KCMA Chemical Resistance methods.

Household Chemicals Test

Vinegar no effect
Lemon Juice no effect
Orange Juice no effect
Grape Juice no effect
Tomato Catsup no effect
Coffee no effect
Olive Oil no effect
100 Proof Alcohol no effect
Water and Detergent, 1% no effect
Mustard (1 hour) very slight discoloring

Cold Check Resistance 20 cycles

CAUTIONS

FOR INDUSTRIAL SHOP APPLICATION ONLY

Thoroughly review product label and Safety Data Sheet (SDS) for safety information and cautions prior to using this product.

To obtain the most current version of the Environmental Data Sheet (EDS), Product Data Sheet (PDS), or Safety Data Sheet (SDS) please visit your local Sherwin-Williams facility or www.paintdocs.com.

Please direct any questions or comments to your local Sherwin-Williams facility.

Note: All purchases of products from Sherwin-Williams are exclusively subject to Sherwin-Williams' terms and conditions of sale which can be found [by following this link \(click here\)](#)
Please review these terms and conditions prior to the purchase of the products.

Sherwin-Williams warrants the product to be free of manufacturing defect in accordance with Sherwin-Williams' quality control procedures. Except for the preceding sentence, due to factors that are outside of Sherwin-Williams' control, including substrate selection, and customer handling, preparation, and application, Sherwin-Williams cannot make any other warranties related to the product or the performance of the product.
SHERWIN-WILLIAMS DISCLAIMS ALL WARRANTIES OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTY OF MERCHANTABILITY, THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.

Liability for products proven to be defectively manufactured will be limited solely to replacement of the defective product or the refund of the purchase price paid for the defective product, as determined by Sherwin-Williams. Under no circumstances shall Sherwin-Williams be liable for indirect, special, incidental or consequential damages, lost profits or punitive damages arising from any cause whatsoever.