

INDUSTRIAL WORK DAY™ GENERAL PURPOSE ENAMEL SPRAY PAINTS

A Quality Finish for Your Hard Industrial Work Day Needs.

- Smooth, durable coating
- Economical solution for miscellaneous spray paint needs
- Interior/exterior use
- Fast drying



CLEANERS, DEGREASERS
LUBES AND SEALANTS

SUPERIOR
LUBRICANTS


PAINTS, COATINGS
AND PRIMERS

CAULKS, SEALANTS
AND ADHESIVES

BRUSHES, ROLLER COVERS
AND ACCESSORIES

Industrial Work Day™ Aerosol Paints offer an economical solution to marking, color coding and miscellaneous spray paint needs where long term quality and durability are not required. These paints are available for shipment with other Krylon Industrial products.

For Interior/Exterior Use On: Marking, color coding and touch-up for a variety of metal and wood surfaces.

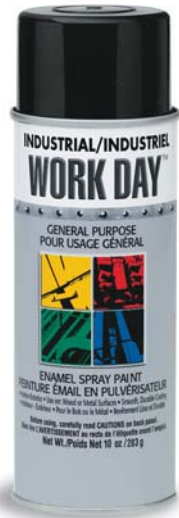

PHYSICAL PROPERTIES

RESIN TYPE: VT Alkyd (exception; Metallic Gold is a lacquer)

NET WEIGHT: 10 oz.

CASE PACK: 12

DRYING TIME @ 70°F @ 50% R.H.

TO TOUCH: 15 minutes

TO HANDLE: 2 hours

MAXIMUM HARDNESS: 5 days

RECOAT: Before 4 hours; or after 5 days

VOC/MIR:

NON-FLAT PAINT: $\geq 65\%$ VOC/ ≥ 1.50 MIR

FLAT PAINT AND PRIMER: $\geq 60\%$ VOC/ ≥ 1.20 MIR

FLASH POINT: -20

COVERAGE PER AEROSOL (THEORETICAL):

9-13 square feet

TEMPERATURE RESISTANCE: 325°F

GAS & OIL RESISTANCE: Gas will remove;

no effect with oil

SHELF LIFE: 3 years from date of manufacture

CLEAN-UP: Lacquer thinner

PRIMER: Recommended

SURFACE PREPARATION

WARNING! If you scrape, sand or remove old paint, you may release lead dust. LEAD IS TOXIC. Contact the National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead.

Remove dirt, grease, wax, moisture, rust and loose paint from surface. Scuff-sand rusted, glossy or hard surfaces. Prime bare or rusted metal. Protect adjacent areas from overspray.

APPLICATION

Use at room temperature. Shake can well until ball rattles and repeat for 10 seconds after each minute of use. Spray 10–12 inches from surface. Spray several thin coats to avoid runs or drips. Dries to touch in 10-15 minutes. Can be handled after one hour. Clear valve after each use by turning can upside down and spraying until clear gas comes out. If spray button becomes clogged, wear eye protection, wipe off the button opening with lacquer thinner - DO NOT stick pin in spray button opening.

PACKAGING

| Part # | UPC Code | Color |
|--------|-----------------|--------------|
| A04401 | 0-75577-04401-6 | Gloss White |
| A04402 | 0-75577-04402-3 | Gloss Black |
| A04403 | 0-75577-04403-0 | Blue |
| A04404 | 0-75577-04404-7 | Gloss Red |
| A04405 | 0-75577-04405-4 | Gray |
| A04406 | 0-75577-04406-1 | Yellow |
| A04407 | 0-75577-04407-8 | Gloss Pink |
| A04408 | 0-75577-04408-5 | Green |
| A04409 | 0-75577-04409-2 | Sky Blue |
| A04410 | 0-75577-04410-8 | Gold |
| A04412 | 0-75577-04412-2 | Flat Black |
| A04413 | 0-75577-04413-9 | Orange |
| A04414 | 0-75577-04414-6 | Clear |
| A04418 | 0-75577-04418-4 | Gray Primer |
| A04419 | 0-75577-04419-1 | Red Primer |
| A04420 | 0-75577-04420-7 | Dark Gray |
| A04422 | 0-75577-04422-1 | Flat White |
| A04431 | 0-75577-04431-3 | Brown |
| A04437 | 0-75577-04437-5 | Oyster White |
| A04456 | 0-75577-04456-6 | True Blue |
| A04457 | 0-75577-04457-3 | Aluminum |

CARTON DIMENSIONS:

L 8.44"x W 5.75" x H 8.44"

RESOURCES

MSDS/PRODUCT DATA SHEETS:

www.KPG-Industrial.com

CUSTOMER SERVICE: 1-800-777-2966

TECHNICAL INFORMATION: 1-800-251-2486

COLOR SELECTION GUIDE

AVAILABLE IN FLAT AND GLOSS ENAMEL



A04401,
A04422

A04402,
A04412

AVAILABLE IN GLOSS ENAMEL ONLY



A04437

A04406



A04410

A04407




A04413

A04404



A04409

A04456



A04403

A04408



A04431


A04457



A04405

A04420

PRIMERS



A04418

A04419

Distributed By:



INDUSTRIAL

Krylon Products Group

101 Prospect Ave. NW

Cleveland, OH 44115

www.KPG-Industrial.com

Tel: 1-800-777-2966