



TECHNICAL DATA

Wood Brightener Concentrate #8003

DESCRIPTION

Recommended Uses:

Cabot Wood Brightener Concentrate #8003 is a concentrate specifically formulated to remove unsightly discoloration of wood caused by tannin bleed in extractive-prone wood species such as cedar and redwood. It also removes nail and metal rust stains. Cabot Wood Brightener is ideal for use on new or previously stained, painted or unfinished wood surfaces including decks, siding, fences, railings and steps. Plus, when used on weathered wood, Cabot Problem-Solver Wood Brightener renews the rich "new wood" look.

Composition:

Contains the concentrated brightener agent, oxalic acid.

Appearance:

Clear blue liquid.

VOC: < 5%

INGREDIENTS: Water, Oxalic Acid.
For more ingredient information, visit our website

Coverage:

One gallon of diluted Cabot Wood Brightener Concentrate will clean approximately 200-250 square feet. These rates will vary depending on the porosity of the surface.

Packaging/Containers:

Concentrate is available in one-gallon containers.

Restrictions:

Never mix or use with other chemicals, detergents, cleaners or with Cabot Wood Cleaner. To do so may result in rapid release of hazardous gases. Keep containers closed when not in use. Keep away from children, animals and vegetation. Prolonged contact with metal may cause pitting.

TECHNICAL DATA

Environmental Impact:

Protect any nearby plants, shrubs or other vegetation by wetting them down with water and covering them with plastic before application. Hose off shrubs when job is done.

Cleanup and Disposal: Rinse out container and application equipment thoroughly with water. Do not reuse container. Dispose of in accordance with local, state and federal regulations. Material Safety Data Sheet (MSDS) available upon request.

Physical and Chemical Data:

Weight: 8.6 pounds per gallon.

Flash Point: None. This product is not flammable.

Shelf Life: For best results, this product should be used as soon as possible after recommended dilution with water.

Solubility: Readily dissolves in water.

Freezing Point: 30°F (-1°C)


% Solids (weight): 8.1

% Solids (volume): 5.1

Solvent Type: Water

Product Type: Brightener agent

V.O.C. Content: < 5%

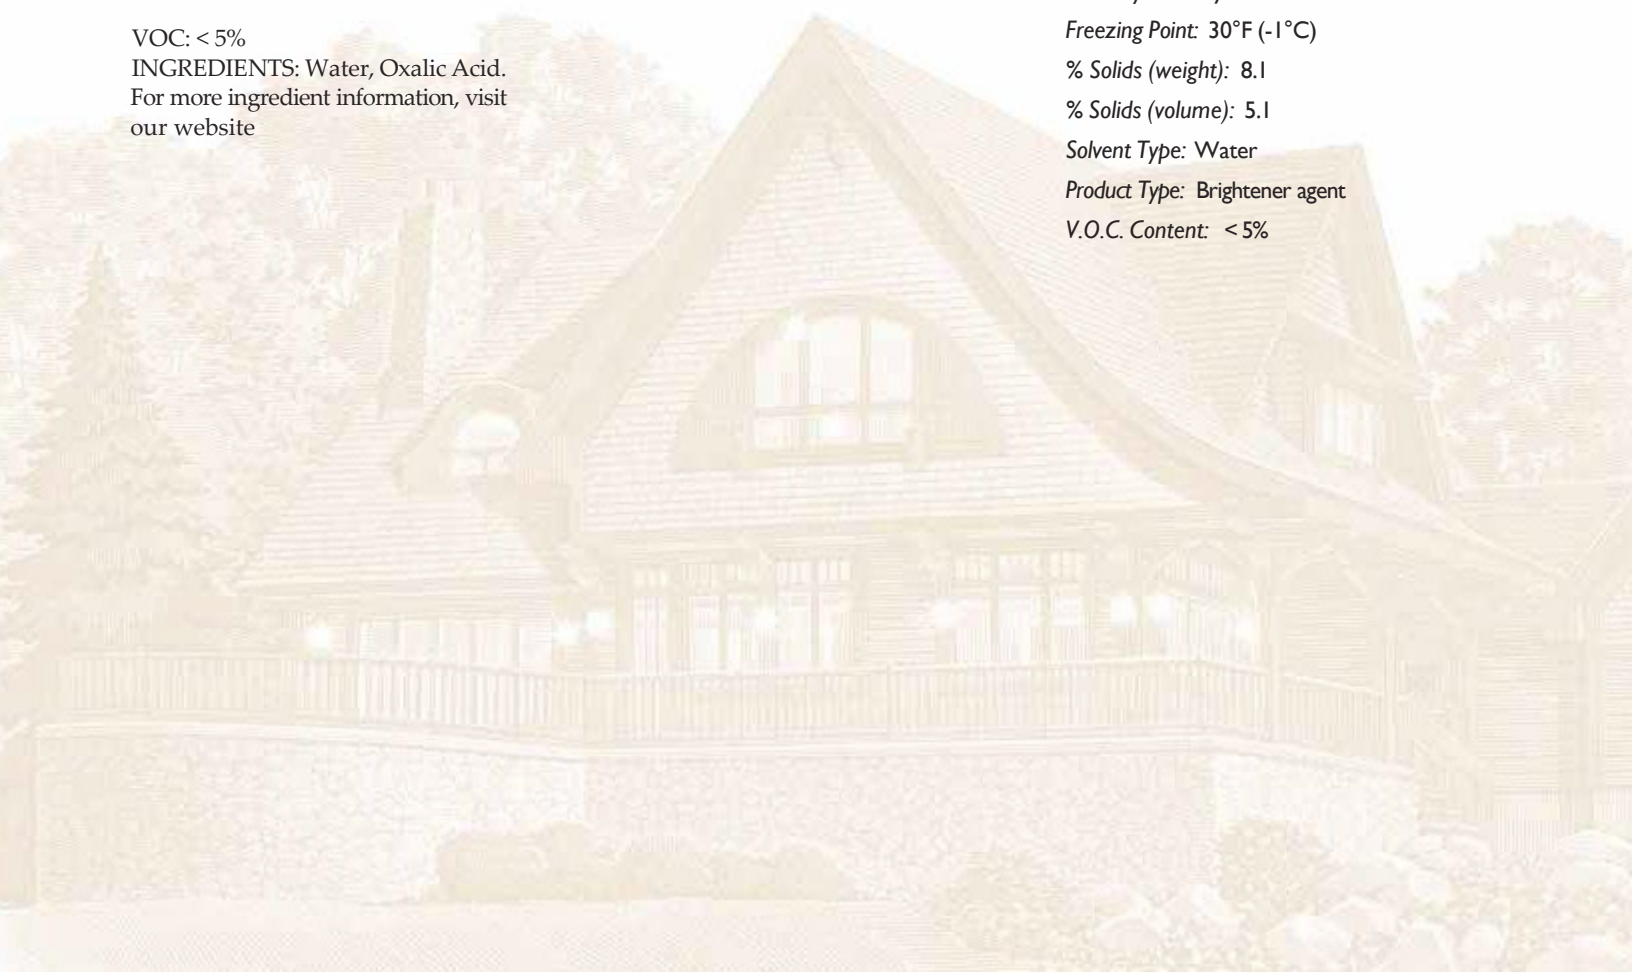

Problem-Solver® Wood Brightener #8003

APPLICATION

Surface Preparation:

APPLY LIBERALLY to problem surfaces using a brush or pump sprayer. Do not apply to hot surfaces. To avoid non-uniform appearances on vertical surfaces, start at the bottom doing a small section at a time and continue to the top. LET SET 15-20 MINUTES. Stubborn areas may require scrubbing with a stiff bristle brush. If surface begins to dry quickly, lightly mist with water. RINSE THOROUGHLY using a garden hose with nozzle at maximum pressure or a high-pressure power washer. Repeat procedure if necessary. IMPORTANT: Allow cleaned surfaces to dry completely before staining or painting. Do not apply this product when temperature is below 50°F (10°C). IMPORTANT: Always wear safety goggles or a face shield, rubber gloves, protective clothing and footwear when spraying. IMPORTANT: When applying and rinsing product, walking surfaces, ladders and scaffolding may become slippery. Rinse all such surfaces thoroughly to remove overspray

LEAD WARNING

WARNING! If you scrape, sand or remove old paint, you may release lead dust. LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE. Wear a NIOSH-approved respirator to control lead exposure. Clean up carefully with a HEPA vacuum and a wet mop. Before you start, find out how to protect yourself and your family by contacting the National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead.

Precautions:

DANGER! Contains Oxalic Acid. **KEEP OUT OF THE REACH OF CHILDREN.** Harmful if inhaled. Causes eye, skin and respiratory tract burns. **Use only with adequate ventilation.** Do not breathe spray mist. Avoid contact with eyes, skin and clothing. Wear protective equipment during application, including acid resistant rubber gloves, goggles, boots, dust mask and other appropriate clothing. Wash thoroughly after handling. **DO NOT TAKE INTERNALLY. Do not mix with other products or chemicals such as peroxides or alkalines, as this will release hazardous gases. First Aid: Eye Contact:** Flush thoroughly with water for at least 15 minutes and get medical attention.* **Skin Contact:** Flush skin thoroughly with soap and water for at least 15 minutes. If irritation persists, get medical attention.* Remove contaminated clothing and shoes. Wash clothing before reuse. Thoroughly clean contaminated shoes. **If Inhaled:** If affected by spray mist, move to fresh air. If breathing difficulty continues, get medical attention.* **If Swallowed:** Give large amounts of water immediately. Do not induce vomiting. Get medical attention immediately.*

*Call poison control center, hospital emergency room or physician immediately.

AVAILABILITY

Cabot Wood Care Products are sold throughout the United States and Canada. For a list of Cabot dealer locations, please contact Cabot's Technical Services & Support at 1-800-US-STAIN.

TECHNICAL SERVICES

For additional technical information, product line color cards, fan decks and liquid product samples, see your specialized Cabot Dealer or call the Cabot Wood Care Specialists in Technical Services & Support toll-free at 1-800-US-STAIN (877-8246).

FILING SYSTEMS

For complete model specifications and technical data on all Cabot products, visit the Cabot Home Page at: cabotstain.com.



Cleveland, OH 44115
1-800-US-STAIN
cabotstain.com
Revised:3/3/2023